

ALTRONIC III^{NG}

Ignition System for Industrial Engines

- Up to 16 outputs per unit
- Proven reliability and high temperature capability
- Ease of maintenance with removable back cover
- High output option
- Long spark duration coil option
- CSA-certified for Class I, Division 2, Group D hazardous areas

Altronic III^{NG} is a self-powered, low-tension, capacitor discharge ignition system for 3- to 16-cylinder, 2- or 4-cycle engines. Powered from a 12-pole permanent magnet alternator.

Altronic III^{NG} provides superior performance throughout the engine's operating range. Its basic design features—permanent magnet alternator; easily serviced, removable back cover containing all electronics; and simple, reliable electronic circuitry—have made Altronic III^{NG} the standard of the industry on medium-to-large industrial gas engines.

Altronic III^{NG}'s mechanical design matches the long life inherent in the electronic circuitry. Sealed ball bearings used throughout are large and underloaded. The alternator has a smooth rotating cycle—a characteristic which contributes to prolonged bearing

and gear life. Synthetic elastomer couplings ensure minimal wear while dampening engine drivetrain vibration.

Options for the Altronic III^{NG} ignition system include standard or long spark duration coils to satisfy the needs of any application. A variety of shielded ignition components are available for Class I, Division 2, Group D hazardous areas.



Superior Performance

Altronic III^{NG} provides strong performance over the entire engine operating range. A low starting speed capability—typically 30 RPM, 2-cycle or 60 RPM, 4-cycle—is made possible by the 12-pole permanent magnet alternator. Delivered spark duration at typical engine KV demand levels is a critical factor for smooth, consistent engine performance. Altronic III^{NG}, using 501061 standard coil gives excellent performance, and the 591010 long-duration coil provides the extended duration required for lean mixture or non-standard fuel applications.

STANDARD OUTPUT			HIGH OUTPUT	
IGNITION COIL	MAX. KV	SPARK DURATION	MAX. KV	SPARK DURATION
501061	34KV	250 usec @ 10KV	40KV	360 usec @ 10KV 200 usec @ 20KV
591010	34KV	450 usec @ 10KV	40KV	550 usec @ 10KV 360 usec @ 20KV

UNSHIELDED COILS
 501061 – Standard
 591010 – Long Duration




Low Maintenance Design and Ease of Service

Altronic III^{NG} has been designed to be as maintenance free as possible. Tens of thousands of Altronic III units in successful field operations since 1968 have resulted in a design evolution to the present field proven form. All bearings are sealed ball bearings. The internal gears are large and underloaded. When service is required, Altronic III^{NG} is designed to make it easy. All electronic components are mounted on the back cover assembly which is easily removed from the alternator section of the unit.

**Altronic III^{NG}
 Alternator
 Section**




**Altronic III^{NG}
 Back Cover**

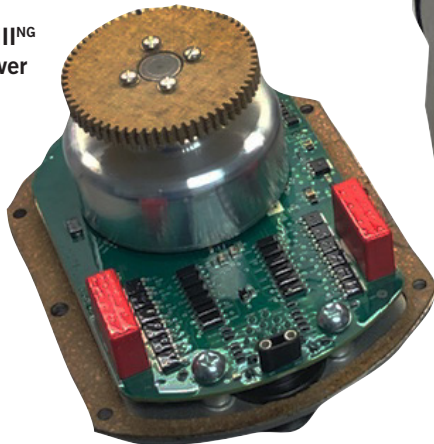

Shielded Components


Shown below are the various shielded coil assembly and lead options. Altronic primary and spark plug cables are fabricated from Teflon® tubing covered with stainless steel braid. All components are CSA certified/FMS approved for Class I, Division 2, Group D hazardous locations.

SHIELDED COIL 501061*S, 591010-S




COIL NO.	DESCRIPTION	INCLUDES
501061-S 591010-S	Shielded Coil - Standard Shielded Coil - Long Duration	A
501061-S-2 591010-S-2	Coil w/Primary & Sec. Fittings	A + B + C + D
501061-S-5 591010-S-5	Coil w/Secondary Fittings	A + D

INTEGRAL COIL 591007, 591011A, 591011B




COIL NO.	DESCRIPTION	INCLUDES
591007 591011A 591011B	Coil 1"-20 x 5.6" long Coil 13/16"-20 x 6.1" long Coil 13/16"-20 x 10.8" long	E
591007-2 591011A-2 591011B-2	Coil with Primary Fittings	E + F + G

SHIELDED PRIMARY CABLE

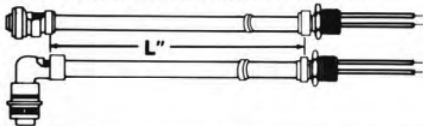

PART NO.	CONNECTOR TYPE	LENGTH L*
593022-L*	Straight	6", 9", 12", 15", 18", 24", 30", 36", 42", 48", 54", 60", 72"
593027-L*	Right Angle	48", 54", 60", 72"

SHIELDED SPARK PLUG LEAD



PART NO.	SPARK PLUG-WELL DEPTH	LENGTH L*
593020-L*	3/4" - 20 1"	10", 13"
593030-L*	3/4" - 20 2"	16", 18"

Altronic Shielded Coils

Shielded coils cover all application requirements with external types (standard and long-duration) and integral coils mounting directly to either 1"-20 or 13/16"-20 thread spark plugs.

**591012
FLANGE-MOUNT
COIL**
Long-duration



**501061-S
SHIELDED COIL**
Standard

**591010-S
SHIELDED COIL**
Long-duration



591007 INTEGRAL COIL
1"-20 thread, 5.6" length



591011 A INTEGRAL COIL (not shown)
13/16"-20 thread, 6.1" length

591011 B INTEGRAL COIL
13/16"-20 thread, 10.8" length

altronic
HOERBIGER Engine Division

712 Trumbull Avenue / Girard, Ohio 44420
(330) 545-9768 / Fax: (330) 545-3231
www.altronic-llc.com Email: sales@altronic-llc.com

Applications

AJAX*
BUDA
CATERPILLAR
CHICAGO PNEUMATIC
CLARK
CLIMAX
COOPER BESSEMER
CUMMINS*
DETROIT DIESEL*
DEUTZ*
DAIHATSU*
DORMAN*
FAIRBANKS MORSE
GANZ MAVAG*
INGERSOLL RAND
JENBACHER*
KOSAN FRICHS*
M.A.N.-BRONS*
M.E.P.
MWM*
NIIGATA*
ROILINE
SACM*
SUPERIOR*
WAUKESHA*
WORTHINGTON
YANMAR*

*Used on OEM basis by this engine manufacturer.